

EXmatic 450 manual operated




- » Robust design
- » Easy and safe access to sensors at any time
- » Integrated connecting hose for plug and play operation
- » Up to 2 different cleaning solutions can be controlled
- » Driven by air at 6 bar only
- » Detection of holder position
- » No electrical installation necessary

EXmatic 450 is a manual control unit including a multi connection hose operating retractable holders especially of EXtract 8XX series with cleaning function for semi-automatic cleaning of sensors

Specifications

Dimensions	200x300x160mm
Housing material	GFK or stainless steel
Multi hose	3m / 5m oder 10m
Sensor rinsing	for 1 or 2 cleaning solutions
Drain valve control	with or without
Drive energy	compressed air, 5-6 bar
Air connector	hose coupling Ø4/6mm
Protection	IP54
Ambient temperature	0...55°C
Retractable housings	EXtract8XX series

Dimensions

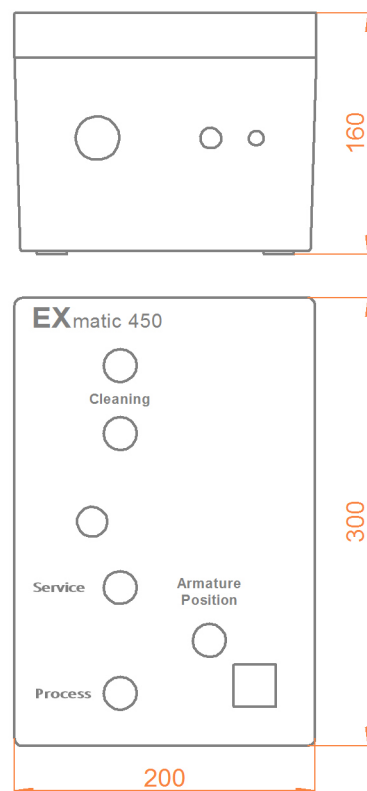

EXmatic 450 manual operated



Installation on EXtract 820 with flow vessel
EXflow720



Usable for industrial applications



Simple connection of all control tubes with
EXconnect 150

Ordercode

Code	Housing	Delivery
GF	Plastic housing	2 weeks
SS	Stainless steel housing	2 weeks

Code	Cleaning	Delivery
1	for one cleaning solution	2 weeks
2	for two cleaning solutions	2 weeks

Code	Drain port	Delivery
0	without	2 weeks
1	with port for drain valve	2 weeks

Code	Length of connecting hose	Delivery
00	without	2 weeks
03	3 meters	2 weeks
05	5 meters	2 weeks
10	10 meters	2 weeks

Code	Fastening angle	Delivery
00	without	2 weeks
EX	for EXtract 8XX	2 weeks