

EXtract 830 hygienic applications




- › Hygienic design, EHEDG- / 3A-approved process connections
- › Extension of sensor-lifetime and reducing of maintenance efforts
- › Automatic safety lock while sensor is removed
- › Plug and play installation, colour- and size-coded connection system
- › Integrated limit switches
- › Usable in ATEX-areas
- › AISI 316L / 1.4404, surface finish Ra < 0.78 electropolished

EXtract 830 is a retractable holder made of stainless steel for hygienic installation of Ø12-225mm sensors on tanks or pipelines

Specifications

Process pressure	0...10bar
Process temperature	-10...140°C
Ambient temperature	-10...70°C
Sensors	Ø12-225mm PG 13.5
Materials	stainless steel 1.4404 /316L
Process surface	< Ra 0.78µm, electro-polished
Sealings	EPDM FDA USP VI, FPM (Viton)
Process connection	Ingold DN25 G1¼", HyCIP® OP25/50/55mm, TriClamp 1.5", TriClamp 2", Varivent N DN40-125, Neumo BioControl D50, DIN11851 DN50
Cleaning ports	G1/8", G1/4", FNPT 1/4"
Operating power	compressed air 4...6 bar
Limit switches	pneumatic, integrated


Dimensions

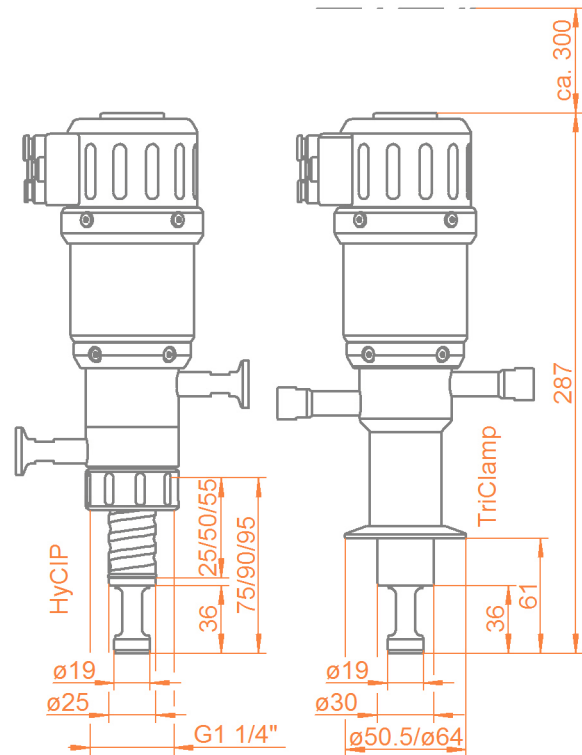

Certificates



EXtract 830 hygienic applications

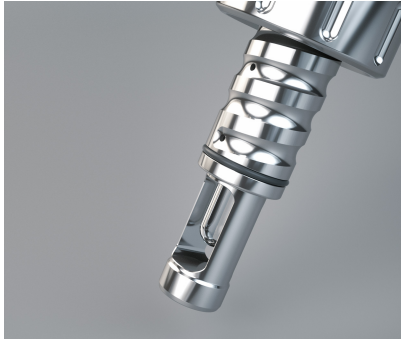

Process Connection HyCIP® OP55 - measuring position



Usable for industrial applications



EXtract 830 - HyCIP® OP55 with TriClamp cleaning connections (option)

Ordercode

Code	Material (wetted parts)	Delivery
4404	Stainless steel 1.4404 / 316L	2 weeks

Code	Sealing Material (wetted sealings)	Delivery
EPD	EPDM/FDA/USP VI	2 weeks
FPM	FPM (Viton)	2 weeks

Code	Sensor type	Delivery
225	225mm PG 13,5 gel-filled	2 weeks
280	280mm PG 13,5 liquid filled	3 weeks

Code	Process Connection	Delivery
IN28	Ingold DN25 G1 1/4" O-Ring-position 28mm	2 weeks
IH25	Ingold DN25 G1 1/4" HyCIP® - OP25mm	4 weeks
IH55	Ingold DN25 G1 1/4" HyCIP® - OP55mm	4 weeks
IH50	Ingold DN25 G1 1/4" HyCIP® - OP50mm	4 weeks
VARN	Varivent N DN40-125	3 weeks
TC15	TriClamp 1-1,5" (OD Ø50.5mm)	3 weeks
TC20	TriClamp 2.0 (OD Ø64mm)	3 weeks
BCT5	NEUMO BioControl D50	3 weeks
MV50	DIN 11851 DN50 (dairy connection)	3 weeks

Code	Cleaning Connection	Delivery
G18	G 1/8" female thread	3 weeks
G14	G 1/4" female thread	2 weeks
N14	1/4" NPT female thread	2 weeks

Code	Position switch	Delivery
PN	pneumatic	2 weeks