


## EXmatic 460 electro pneumatic - programmable

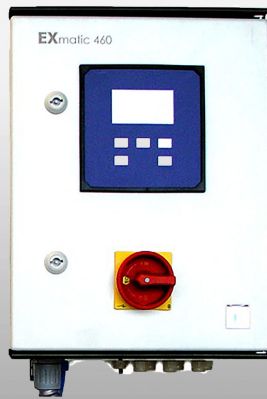



- › Full automatic measuring point
- › High extension of sensor-lifetime and reducing of servicing efforts
- › Safe removal of the sensor under current process conditions
- › Operates with any kind of transmitter, open system
- › Two different cleaning solutions usable
- › Sealing water function
- › Pre- and post-cleaning function

EXmatic 460 is an electro-pneumatic control unit for fully automatic control of pneumatic retractable housings of EXtract 8XX series with integrated connection hose for "plug and play" installation and individual programming

### Specifications

Voltage supply	24V DC / 30VA
Air supply	compressed air 5-6bar
Input for ext. trigger	24V DC internal power supply for potentialfree contact
Current consumption	0.65 A
Output ext. relays	24V DC max. 80mA
Output clean. pumps	24V DC max. 80mA
Output alarm contacts	24V DC max. 80mA
Housing material	glass-reinforced plastic or stainless steel
Housing dimensions	300 x 400 x 200mm
Ambient temperature	0...+55°C
Type of protection	IP54

### Dimensions

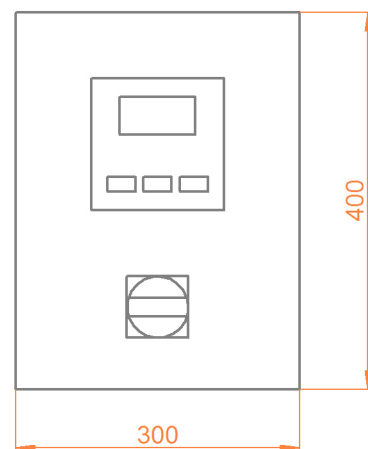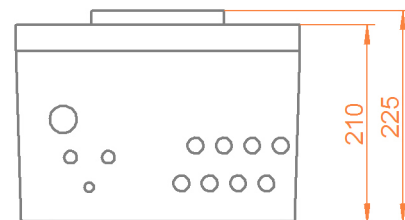

## EXmatic 460 electro pneumatic - programmable



Installation on EXtract 820 with flow vessel EXflow720



Usable for industrial applications



Simple connection of all control tubes with EXconnect 150

### Ordercode

Code	Housing	Delivery
GF	Plastic housing	2 weeks
SS	Stainless steel housing	2 weeks

Code	Cleaning	Delivery
1	for one cleaning solution	2 weeks
2	for two cleaning solutions	2 weeks

Code	Drain port	Delivery
0	without	2 weeks
1	with port for drain valve	2 weeks

Code	Length of connecting hose	Delivery
00	without	2 weeks
03	3 meters	2 weeks
05	5 meters	2 weeks
10	10 meters	2 weeks

Code	Fastening angle	Delivery
00	without	2 weeks
EX	for EXtract 8XX	2 weeks