

EXcell 241 NIR Biomass Sensor DN25





- » EBC / FAU / mg/l / AU / OD or customer defined units
- » Design for DN 25 weld-in sockets
- » With integrated amplifier
- » No traditional transmitter necessary
- » Wearless sapphire windows, CIP/SIP-capable
- » Hygienic design, autoclavable
- » Maintenance free due to LED light source

EXcell 241 is a high precision digital NIR-absorbance sensor for DN25-weld in sockets monitoring biomass measurement in biotech, food and pharma applications for both laboratories and industrial production processes

Specifications

Measuring range:	0...6 AU, 0...6600 EBC
Resolution:	0,1 % or 0,01 AU
Accuracy:	± 1 %
Reproducibility:	≤ 1 % from final value
Wave length:	850 nm
Light source:	LED
Optical path length:	5 / 10 / 20 mm
Immersion length:	70-85 mm / 110-125 mm
Wetted material:	stainless steel 1.4435 (316L)
Surface:	Ra <0.37 µm
Measuring window:	sapphire
Process connection:	thread G1 1/4
Process temperature:	0...90 °C, 135 °C max. 1 hour (SIP cycle)
Process pressure:	max. 16 bar (232psi)
Electrical connection:	Fischer Core Series
Cable length:	2 m / 5 m
Interfaces:	USB, RS485 Modbus, 4...20 mA
Protection class:	IP68

Typical Measurements

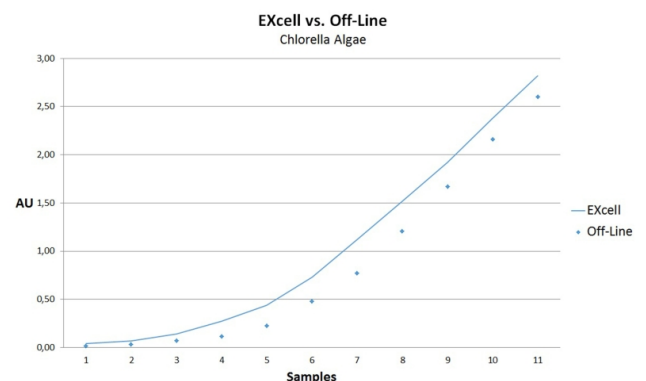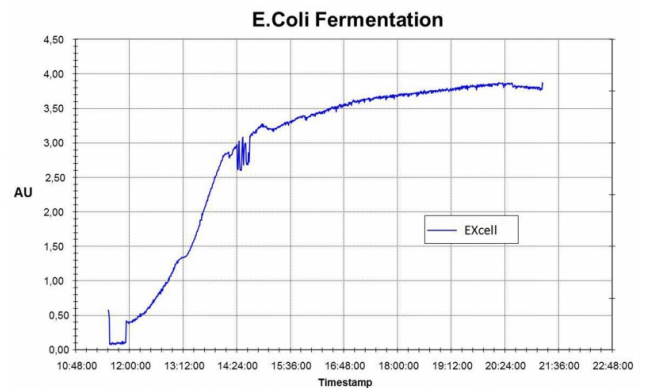


Contact:



www.southforkinstruments.com

Tel: 925 461 5059

EXcell 241 NIR Biomass Sensor DN25

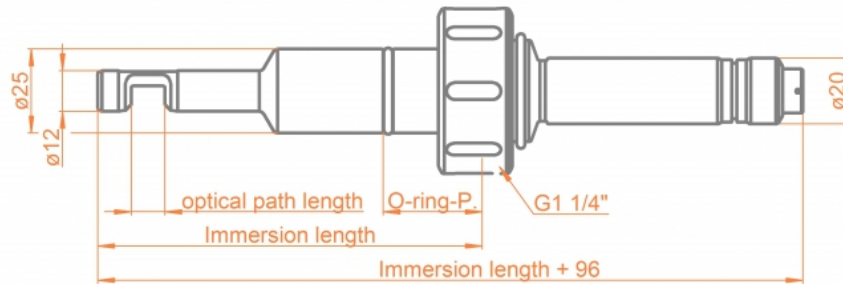

Order code

Code	Measuring range	Delivery time
C	0...6 AU / 0...6600 EBC / 0...12 OD	3 Weeks
Code	Immersion length	Delivery time
070	65mm + optical path length	3 Weeks
110	105mm + optical path length	3 Weeks
Code	Optical path length	Delivery time
05	5 mm	3 Weeks
10	10 mm	3 Weeks
20	20 mm	3 Weeks
Code	O-ring position	Delivery time
25	25 mm	4 Weeks
28	28 mm	4 Weeks
29	29 mm	4 Weeks
30	30 mm (for standard weld-in socket)	3 Weeks
35	35 mm	4 Weeks
50	50 mm (only for immersion length code 110)	4 Weeks
55	55 mm (only for immersion length code 110)	4 Weeks
Code	Sealing material (wetted sealings)	Delivery time
EPD	EPDM (FDA/USP VI)	3 Weeks
Code	Interface	Delivery time
D0	Modbus RTU (RS485)	3 Weeks
DA	Modbus RTU (RS485) / Analogue 4...20 mA	3 Weeks

Accessories



Communication interface ECI-03 with analogue output and switching contact



Communication interface ECI-02 RS485 Modbus



EXcap 110 - Set of optical reference filters