


# EXmatic 470 / 471

## TECHNICAL INFORMATION

Control unit  
for retractable probe housings

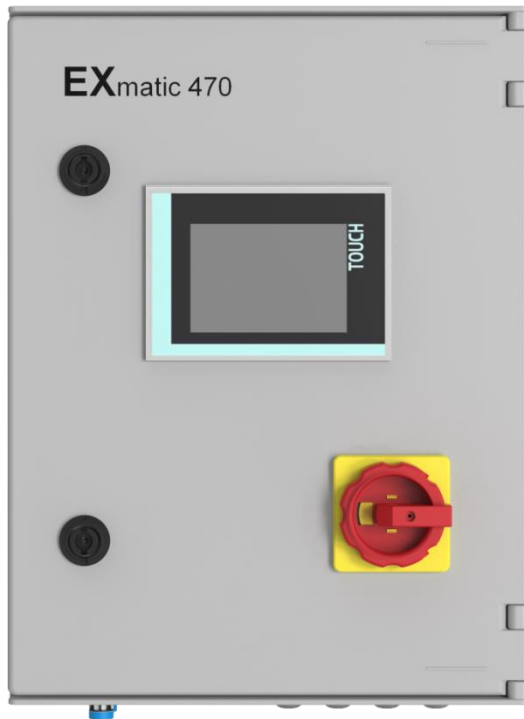

All brand and product names are trademarks of the company:

EXNER PROCESS EQUIPMENT GmbH

## Imprint

Distributed by:

**Exner Process Equipment GmbH**

Carl-Metz-Str. 26

D-76275 Ettlingen

**For Support, Contact:**



[www.southforkinstruments.com](http://www.southforkinstruments.com)

Tel: 925 461 5059

Date of issue: 2023-07-03

As per: 17.04.2023

File: Technical information EXmatic 470\_471 230417

© 2020, Dipl.-Ing. [Graduate Engineer] Detlef Exner

All rights reserved, including the translation.

The reproduction of the content in these operating instructions is subject to prior written approval by EXNER PROCESS EQUIPMENT GMBH, ETTLINGEN.

All technical information, drawings, etc. are subject to the protection of copyright law.

Technical modifications reserved.

Printed on chlorine-free and acid-free pulp paper.

# Table of contents

<b>1</b>	<b>Technical data</b> .....	<b>4</b>
1.1	Standards and directives.....	4
1.2	Material properties.....	4
1.3	Pneumatics.....	4
1.4	Dimensions.....	4
1.5	Environmental conditions.....	5
1.6	Connection values.....	5
1.7	Cleaning valves (optional).....	5
1.8	Identification plate.....	6
<b>2</b>	<b>Product description</b> .....	<b>7</b>
2.1	EXmatic 470 / 471 electro-pneumatic control unit.....	7
2.2	Process integration.....	9
<b>3</b>	<b>Order structure</b> .....	<b>12</b>
3.1	EXmatic 470.....	12
3.2	EXmatic 471.....	13
<b>4</b>	<b>Spare parts and accessories</b> .....	<b>14</b>
<b>5</b>	<b>Certificates and compliance</b> .....	<b>16</b>

# 1 Technical data

## 1.1 Standards and directives

The following directives were applied when manufacturing the control unit:

- » EMC-Directive 2014/30/EU Module A
- » Directive 2001/95/EC on general product safety

## 1.2 Material properties

Control cabinet materials		
Housing	GRP	
	Stainless steel	Option
Display	Plastic	Option

## 1.3 Pneumatics

Pneumatic hoses		
	Ø - external	Ø - internal
For compressed air supply	8 mm	6 mm
For control air	6 mm	4 mm
For position feedback	4 mm	2 mm

## 1.4 Dimensions

Dimensions		
	Plastic	Stainless steel
Width	300 mm	300 mm
Height	400 mm	400 mm
Depth	250 mm	250 mm

## 1.5 Environmental conditions

Temperature		
Ambient temperature	0...55 °C	
Transport and storage temperature	-10...60 °C	
Environment		
Relative humidity	10... 95 %	Non-condensing

Protection class		
Housing with switches and LEDs	IP 54	With guard door closed
Housing with display	IP 54	With guard door closed

## 1.6 Connection values

Electrical connection values		
Voltage supply	24 V DC	30 VA
Input for external contacts	24 V DC	Self-supply for floating contact
Maximum current consumption	1.6 A	
Output for external relay, Cleaning pump I, II and III	24 V DC	Max. 250 mA
Output for status and alarm contacts	24 V DC	Max. 100 mA

## 1.7 Cleaning valves (optional)

Compressed air	
	<ul style="list-style-type: none"> <li>» According to ISO8573-1:2010 [5:4:4]</li> <li>» Filtered, 40 µm, water and oil-free</li> <li>» 6 bar</li> <li>» No continuous air consumption</li> </ul>

## 1.8 Identification plate

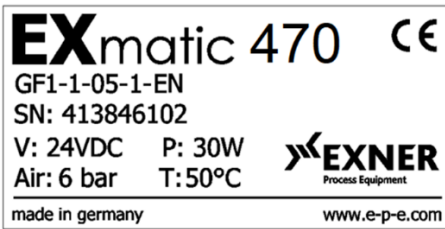


Fig. 1: Identification plate (example EXmatic 470)

The identification plate is located on the inside of the cabinet door!


In case of queries, please contact your retailer directly!

## 2 Product description

### 2.1 EXmatic 470 / 471 electro-pneumatic control unit

The probe housing control unit EXmatic 470 is available in configurations with or without a display. The EXmatic 471 version always has a display.

External view



1	Control panel
2	Main switch
3	Compressed air connection




1	Status or position indicator via LED
2	Automatic/service switch


Fig. 2: Probe housing control unit from the outside (with or without a display)

## 2 Product description

### Internal view (example EXmatic 470)

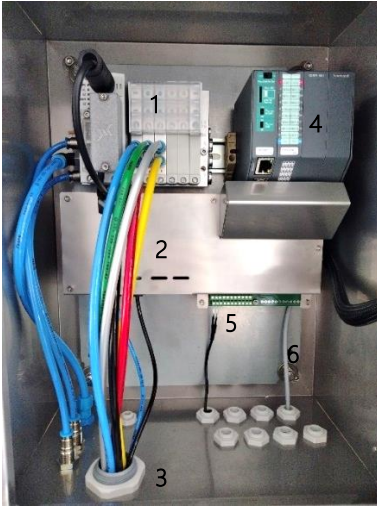

1	Valve manifold
2	Pressure switch
3	Multi-connection hose inlet
4	Control unit (PLC)
5	Connection terminals
6	PE connection

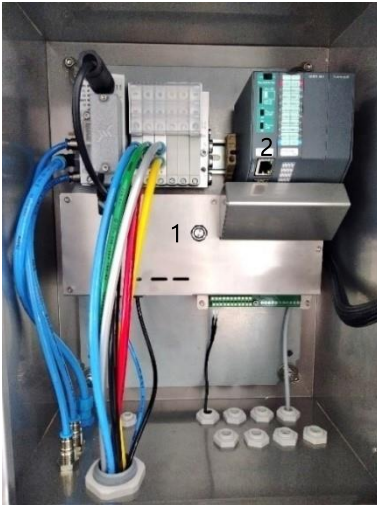

1	Push button (momentary) start/stop for the cleaning programme
2	LAN Port

Fig. 3: Control unit from the inside (with/without display)



## Function

The probe housing control unit EXmatic 470 / 471 enables fully automatic control and monitoring of measuring and cleaning cycles of one (EXmatic 470) or two (EXmatic 471) pneumatic retractable probe housing(s). Cleaning times, measuring intervals and start times can be parameterised and adjusted to individual requirements.

## Input

The control unit monitors the respective position feedback from the retractable probe housing via integrated inputs.

Automatic cleaning can be started via an additional input.

## Output

The respective status of the retractable housing and the control unit can be transmitted to a superordinate process control system via four contact outputs.

## Retractable probe housing

The retractable probe housing and cleaning valves for control of the cleaning solution are connected to the probe housing control system via pneumatic hoses. This should be realised via the dedicated EXconnect multi-connection hose.

## 2.2 Process integration

The EXmatic 470 / 471 probe housing control unit is supplied with 24V DC and compressed air with a pressure of 6 bar. Connection to the retractable probe housing and the cleaning and drain valves is realised via pneumatic hoses which are bundled in a multi-connection hose.



The probe housing control unit features a manual as well as an automatic mode. In manual mode, motion of the retractable probe housing and the individual cleaning valves can be controlled manually. The probe housing control unit without a display provides this function only if the "RemoteStage" software described is used.

In automatic mode, a parameterised cleaning process runs after a cleaning cycle is started. After its completion, the retractable probe housing moves to "Measuring" position.

### 3 Order structure

#### 3.1 EXmatic 470

	Code	Housing
	GF0	Plastic (GRP) without a display
	GF1	Plastic (GRP) with a display
	SS0	Stainless steel without a display
	SS1	Stainless steel with a display
	XXX	Special version
		<b>Code</b> <b>Cleaning</b>
	1	For one cleaning solution
	2	For two cleaning solutions
	3	For three cleaning solutions
	X	Special version
		<b>Code</b> <b>Multi-connection hose length</b>
	00	Without multi-connection hose
	03	3 metres
	05	5 metres
	10	10 metres
	XX	Special version
		<b>Code</b> <b>Compressed air maintenance unit</b>
	0	Without
	1	With an integrated maintenance unit
	X	Special version
		<b>Code</b> <b>Interface</b>
	EN	Without
	XX	Special version
EXmatic 470		<b>Order code</b>

## 3.2 EXmatic 471

	Co- de	Housing
	GF1	Plastic (GRP) with a display
	SS1	Stainless steel with a display
	XXX	Special version
		<b>Co- de</b> <b>Cleaning</b>
	11	For one cleaning solution / For one cleaning solution
	12	For one cleaning solution / For two cleaning solutions
	13	For one cleaning solution / For three cleaning solutions
	22	For two cleaning solutions / For two cleaning solutions
	23	For two cleaning solutions / For three cleaning solutions
	33	For three cleaning solutions / For three cleaning solutions
	XX	Special version
		<b>Co- de</b> <b>Multi-connection hose length</b>
	0000	Without multi-connection hose / Without multi-connection hose
	0003	Without multi-connection hose / 3 metres
	0005	Without multi-connection hose / 5 metres
	0010	Without multi-connection hose / 10 metres
	0303	3 metres / 3 metres
	0305	3 metres / 5 metres
	0310	3 metres / 10 metres
	0505	5 metres / 5 metres
	0510	5 metres / 10 metres
	1010	10 metres / 10 metres
	XXX	Special version
		<b>Code</b> <b>Interface</b>
	EN	Without
	XX	Special version
EXmatic 471		<b>Order code</b>

## 4 Spare parts and accessories

Spare parts		
EXmatic 470 / 471	Spare parts	Order number
	Diaphragm valve PTFE/EPDM DN12 PN6 for cleaning solution	2-095-70-001
	Pilot control valve 5/2-way monostable, 24 V DC	2-091-10-003
	Pilot control valve 2x3/2-way NC, 24 V DC	2-091-10-004
	Pressure switch 0-10 bar Ø 4 mm PNP	2-096-00-002
	Diaphragm PTFE/EPDM for cleaning valve	2-052-45-001

Accessories		
Control cabinet	Accessories	Order number
	Wall mounting, plastic control cabinet	2-083-73-001
	Wall mounting, stainless steel control cabinet	2-083-73-002
	Pole mounting (plastic/stainless steel)	2-083-70-003
Diaphragm valves	Accessories	Order number
PVDF/EPDM G 3/8", DN12, PN6, NC	Cleaning valve set for one cleaning valve and one drain valve	2-095-70-002
	Cleaning valve set for two cleaning valves and one drain valve	2-095-70-003
	Cleaning valve set for three cleaning valves and one drain valve	2-095-70-004
Maintenance unit	Accessories	Order number
	Compressed air maintenance unit	2-078-73-001

**NOTE**

When ordering spare parts and accessories, please specify the serial number of your unit.

---

# 5 Certificates and compliance

## EU-Declaration of conformity

for  
**Control unit EXmatic470/471**

We declare under our sole responsibility that the product, to which this declaration relates, is in conformity with the following standards and the normative documents:

EU- Directive	harmonized standards
EMC-Directive 2014/30/EU Module A	DIN EN 61326-1:2013 IEC 61326-1: 2020 Emission: Class B Immunity: Industrial environment
Directive 2001/95/EC on general product safety	DIN EN 61010-1:2020-03
RoHS 2 Directive 2011/65/EU + Delegated Directive 2015/863/EU	DIN EN 63000:2019-05

This declaration applies to all identical specimens of the product, which are manufactured according to the development-, design- and manufacturing drawings and descriptions, which are part of this declaration.

This declaration is given by the manufacturer.

Name of company: **Exner Process Equipment GmbH**  
Address: Carl-Metz-Straße 26  
D-76275 Ettlingen  
Germany

*E. Hlup*  
Place

*26.04.2022*  
Date

*Michael Tottewitz*  
Michael Tottewitz  
General Manager





## UKCA-Declaration of conformity

for  
**Control unit EXmatic470/471**

We declare under our sole responsibility that the product, to which this declaration relates, is in conformity with the following standards and the normative documents:

UK- regulation	applied standards
EMC-regulation: Electromagnetic Compatibility Regulations 2016	BS EN IEC 61326-1: 2021 Emission: Class B Immunity: Industrial environment
General Product Safety Regulations 2005	BS EN 61010-1+A1:2017
RoHS regulation: The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012	BS IEC 63000:2018

This declaration applies to all identical specimens of the product, which are manufactured according to the development-, design- and manufacturing drawings and descriptions, which are part of this declaration.

This declaration is given by the manufacturer.

Name of company:  
Address:

**Exner Process Equipment GmbH**  
Carl-Metz-Straße 26  
D-76275 Ettlingen  
  
Germany

  
Place

13.01.2023  
Date

  
Michael Tottewitz  
General Manager





For Support, Contact:



[www.southforkinstruments.com](http://www.southforkinstruments.com)

Tel: 925 461 5059



Exner Process Equipment GmbH  
Carl-Metz-Str. 26  
D-76275 Ettlingen  
Germany

tel +49 (0)7243-94 54 29-0  
fax +49 (0)7243-94 54 29-99  
mail [info@e-p-e.de](mailto:info@e-p-e.de)

[www.e-p-e.com](http://www.e-p-e.com)