


EXmatic 470 electro pneumatic - programmable

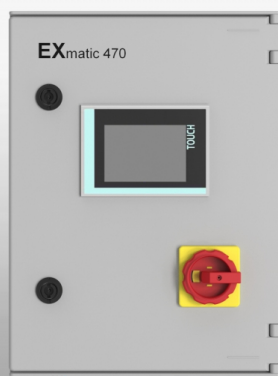


- » Full automatic measuring point
- » High extension of sensor-lifetime and reducing of servicing efforts
- » Open system - operates with any kind of transmitter
- » Output signals for connecting with PCS
- » Three different cleaning solutions usable
- » Sealing water function
- » Pre- and post-cleaning function

EXmatic 470 is an electro-pneumatic control unit for fully automatic control of pneumatic retractable probe housings of EXtract 8XX series with integrated connection hose for "plug and play" installation and individual programming.

Specifications

Voltage supply:	24 V DC / 30 VA
Air supply:	compressed air 6 bar
Input for ext. trigger:	24 V DC internal power supply for potentialfree contact
Current consumption:	1,6 A max.
Output ext. relays:	24 V DC max. 250 mA
Output pump:	24 V DC max. 250 mA
Output alarm contacts:	24 V DC max. 100 mA
Housing material:	glass-reinforced plastic or stainless steel
Housing dimensions:	300 x 400 x 200 mm
Ambient temperature:	0...+55 °C
Type of protection:	IP54

Dimensions

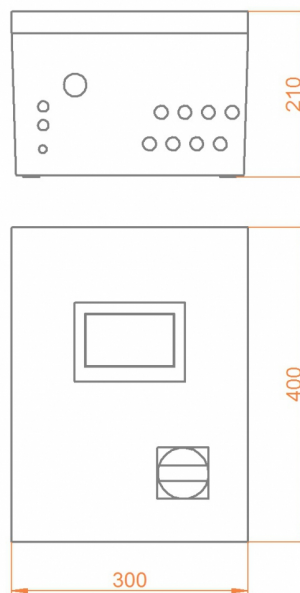

Contact:



www.southforkinstruments.com

Tel: 925 461 5059

EXmatic 470 electro pneumatic - programmable



EXconnect connected to retractable probe housing



Measuring point with probe housing, flow-through fitting and control unit

Order code

Code	Housing	Delivery time
GF0	Plastic housing without Display	3 Weeks
GF1	Plastic housing with Display	4 Weeks
SS0	Stainless steel housing without Display	4 Weeks
SS1	Stainless steel housing with Display	4 Weeks

Code	Cleaning	Delivery time
1	for one cleaning solution	3 Weeks
2	for two cleaning solutions	3 Weeks
3	for three cleaning solutions	3 Weeks

Code	Length of connecting hose	Delivery time
00	without	3 Weeks
03	3 meters	3 Weeks
05	5 meters	3 Weeks
10	10 meters	3 Weeks

Code	Maintenance unit compressed air	Delivery time
0	without	3 Weeks
1	with integrated maintenance unit	4 Weeks

Code	Interface	Delivery time
EN	without	3 Weeks