

FL007 Oil in Water Monitor

Features

- Simultaneous UV fluorescence and turbidity
- Hygienic Ø12 mm PG 13.5 immersion probe
- Real time in-line measurement
- Calibration for 16 different oil types
- Suitable for hazardous area use
- Alarm, 4-20mA and Modbus communications

The Kemtrak FL007 is a fiber optic probe based oil in water monitor. A state-of-the-art combined fluorescence and turbidity measurement assures reliable continuous monitoring of oil and hydrocarbon contamination in water.

Mineral oils rich in aromatic content will fluoresce when illuminated with ultraviolet light. The intensity of this fluorescence is dependent upon the polyaromatic hydrocarbon (PAH) content of the oil. Typical oils that fluoresce include fuel oil, crude oil, hydraulic oil and transformer oil.

Each oil has its own unique fluorescence intensity resulting from its specific PAH content. The combined fluorescence from both dissolved and dispersed oil in water can be measured and correlated to the oil content. Entrained gas and solids present in the stream will not fluoresce and therefore do not affect the measurement.

However, non-mineral oils or hydrocarbons low in aromatic content may not fluoresce. Hydrocarbons and oils with a low water solubility will result in a turbid solution that can easily be detected using the dual turbidity measurement instantly informing the operator of leaks or contamination resulting in a high measurement confidence.

The immersion probe has the same dimensions as industry standard Ø12 mm PG 13.5 pH sensors allowing a range of standard fittings and retractable probe holders to be used.

Standard features include 16 linearization tables for multiple product switching, remote zeroing, automatic cleaning cycle and signal filtering. The robust industrial




Typical Applications:

- Trace oil in water
- Leak detection
- Cooling water & condensate return
- Drinking water
- Wastewater monitoring
- Environmental monitoring

fiber optic probe with scratch resistant sapphire optics, no electronics and no moving parts are well suited for both ordinary and hazardous area installation. A built-in graphical internet based interface allows remote operation, calibration, validation and data trending using a standard web browser.

All Kemtrak products are designed to meet the most demanding application specifications and are made from the highest quality materials to ensure exceptionally long life and the highest reliability possible.

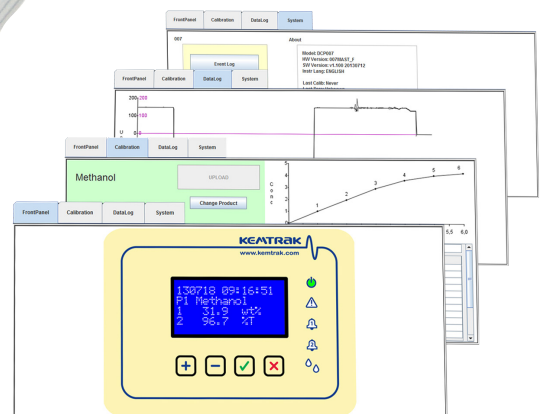

Housing

Stainless steel EN 1.4301 (X5CrNi18-10), AISI 304 (V2A)
 Captive lid screws & external mounting brackets stainless steel
 224 x 215 x 125 mm (L x W x D)
 IP 65 / EN 60529

Display

16 x 4 alphanumeric white on blue dot matrix LCD display
 LED background illuminated
 Measurement updates every second
 LED 1 (green): Power on
 LED 2 (red): System fault
 LED 3 & 4 (orange): Alarm 1 & Alarm 2
 LED 5 (blue): Clean / Hold

Operation

4 push buttons
 Remote HTML/Java interface (TCP/IP connection via Ethernet port)

Software Features:

- Auto gain: Fully automatic photometer gain switching
- Auto zero: Automatically, locally or remotely activated zero
- Calibration: 16 linearization tables for concentration & mA output
- Damping: From 0 to 9999s with noise (air bubble / particle) filter
- Memory: Nonvolatile - all data retained upon power failure
- Security: Alphanumeric password protection

Data Logger

- >17000 data points (timestamp, average, max. & min.), ring buffer
- Configurable log time interval 1s to 24hr

Event Logger

- >16000 events, ring buffer
- Timestamp, alarms, zeroing, cleaning, product change, calibration & system events (power, system warning & error messages)

Automatic Cleaning Control

- Automatic cleaning sequence, triggering dedicated relay output
- Manual trigger or external trigger via digital input
- Configurable automatic cleaning interval, 15min to 2months
- Configurable cleaning duration from 0 to 9999s
- Auto-zero after clean option
- Hold value after clean (to equilibrate) 0 to 9999s

PID Controller

Control method: Pulse width modulated relay output or 0/4-20mA output
 Control period: 2 - 99s
 Proportional gain: 0.0000 - 999999
 Integral time: 0.0000 - 999999s
 Derivative time: 0.0000 - 999999s

Remote Input

5 x Digital input (potential free contact) for:
 • Input 1-3: Product/range selection
 • Input 4: Zero, instant zero, clean or clean & Zero
 • Input 5: Hold (freeze output), data log control or light source control

Light Source

High performance UV light emitting diodes (LEDs)
 Typical lamp lifetime > 10 000 hrs

Fluorescence

Measuring principle: UV fluorescence
 Excitation: 280nm
 Detection: 360nm
 Nominal Range: 0 - 5 000 µg/L PAH_{ph}e
 ca. 0 - 200 ppm oil in water*
 Detection limit: 1 µg/L PAH_{ph}e

Turbidity

Measuring principle: Backscatter turbidity
 Nominal Range: 0 - 10 000 FTU
 ca. 0 - 20 000 ppm oil in water*
 Resolution: Typically < ± 0.5 FTU

* Oil in water response is dependent on oil type
 Up to 16 oils can be customer calibrated

Accuracy

Typically <±2% of reading

mA Output

1 x selectable 0 - 20mA / 4 - 20mA (NAMUR, max 21.6mA)
 Optional second mA output
 Galvanically isolated, tested during final inspection to 500 VDC
 Accuracy: <0.1%
 Resolution: 0.025%
 Load: 0 - 600 Ohm

Relay Outputs

1 x 1 A 240 VAC Failsafe output (active when system is ok)
 2 x 1 A 240 VAC User configurable (alarm, PID)
 1 x 1 A 240 VAC Automatic cleaning control
 Fuses: 4 x 1 A (type: MXT), max 100A breaking capacity
 LED status indicators flash when relays are active

Fail-Safe:

Dedicated relay output, 1 A 240 VAC
 mA output value used to signal a system fault (NAMUR <3.6 mA or >21.0 mA)

Network interface (remote communications):

TCP/IP, 10Base-T and 100Base-TX Link
 Connector: RJ45
 Protocol:
 1) HTML/Java interface using native protocol over TCP/IP
 Software: Web browser with Java version 6 or later
 2) MODBUS server (slave) over TCP/IP (V1.1.b3 compliant)
 Functions: {0x03, 0x04, 0x2B/0x0E - conformity 0x01}

Operating Conditions

Ambient temperature: 0°C to +50°C (32°F to 122°F)
 Transport: -20°C to +70°C (-4°F to 158°F)

Power Supply

100-240 VAC, 50-60Hz & 22 - 30 VAC/VDC
 Mains fuse: 1 A (type MST), Max breaking capacity 35A

Power Consumption

25 VA (max.)

Certificates

CE, ISO 9001:2015, IECEx,
 ATEX Ex d IIB + H2 T5 IP66 Category (Ex) II 2 G,
 UL Class I Division 1 & II Gas Groups B,C,D,
 UL Class II Groups E,F,G and Class III,
 NEMA 479

Process Connection

Compatible with industrial pH sensor dimensions
 DIN 19263:2007-05, Ø12mm, PG 13.5
 Standard probe length 120±2mm, 225mm & 425mm
 Custom lengths available on request

Materials

Stainless EN 1.4435 / 316L or
 Hastelloy C-22

Window

Sapphire

Surface Finish

Ra <0.38µm (polished)

Elastomers

FPM (FKM/Viton®), FFKM (Chemraz®/Kalrez®, FDA), EPDM (FDA)

Operating Conditions

Ambient & process temperatures up to 200°C (392°F)
 Process pressure from 10mbar to 50bar (0,14 - 725psi)
 Operating conditions subject to material and design in use

Fibre Optic cable

Silica core photonic fiber with Kevlar® reinforced flexible
 LZSH coated stainless steel jacket
 Fully-interlocked stainless steel conduit for use above 85°C (185°F)
 Terminated with SMA 905 connectors.
 Lengths up to 5m (16foot)

Protection

IP66 / EN 60529



Kemtrak AB • Box 2940 • SE-187 29 Stockholm • Sweden
 Info@kemtrak.com • www.kemtrak.com

We reserve the right to make changes
 without previous notice

South Fork Instruments, Inc.

3845 Buffalo Road Tel. : +1 (925) 461 5059
 Auburn, CA 95602 info@southforkinstruments.com
 USA http://www.southforkinst.com

Kemtrak is a leading manufacturer of fiber optic measuring and automation products for the process engineering industry. Kemtrak provides tailor made solutions to meet the needs of a wide range of industries including chemical, petrochemical & offshore, biotech, pharmaceutical, food & beverage, pulp and paper and water & environmental. Kemtrak has trained representatives and support personnel globally and is certified according to ISO 9001:2015.