


ON-LINE MONITORING OF NGL COLOR

The recovery of NGL from raw natural gas has significant economic value. But receivers at the end of NGL pipelines are highly concerned about fluid quality, as impurities can damage refining equipment.



THE EXTRACTION OF NATURAL GAS LIQUID (NGL)

Natural gas when it is first recovered from a well is a mixture of C1 through C6+ hydrocarbons along with contaminants such as water, sulfur compounds, and carbon dioxide.

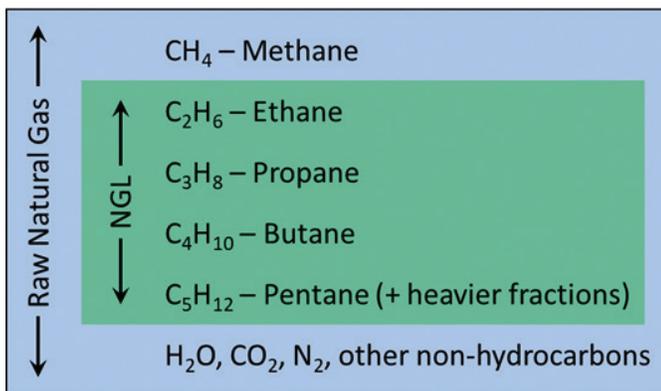

Gas processing plants separate methane (C1) from the raw natural gas stream for distribution around the country in natural gas pipelines. The remaining products (C2+) are typically transported in an NGL pipeline for further processing at other facilities such as refineries.

Several steps are needed in the separation process. First, acid gases such as CO₂ and H₂S are removed (sweetening) and water is removed. The resulting

sweet, dry gas is processed in either a refrigeration or cryogenic separation plant. These plants liquefy the C₂+ to separate it from the methane. The C₂+ liquid mixture is commonly referred to as natural gas liquid (NGL). The recovery of NGL brings significant additional economic value to gas processing operations. NGL contains products that can be used as direct energy sources and as raw components for various petrochemical processes.

MONITORING OF NGL QUALITY IS CRITICAL

The composition of NGL varies widely from gas field to gas field but all contain similar components (propane, butane, ethylene, etc.). Of prime importance to the receiver at the end of the NGL pipeline is the quality of the fluid. A stream that contains a great deal of impurities can be damaging to refining equipment and costly to clean up. Contracts between supplier and receiver can often contain clauses that allow the receiver to back charge costs incurred when low quality streams are received. As many pipelines are shared, it is of prime importance to monitor the inputs to the pipeline in order to apportion such costs properly in the event impure material is received.

A key quality indicator of NGL is its color. The

presence of impurities such as sulfur-bearing compounds and corrosion products result in a yellowing of the NGL. This yellowing can be very subtle and almost imperceptible to the human eye, but still creates problems downstream. This color can be easily measured on the standard Saybolt color scale.



THE KEMTRAK SOLUTION

The Kemtrak DCP007 photometric analyzer is ideally suited to continuous, in-line color analysis of NGL. The DCP007 is a fiber optic based unit that is specifically configured to each application. Using an all-in-one-place electronic design, the optical bench and all electronics are contained in one compact enclosure for ease of installation. Light is generated using non-drifting LED sources and connected to application optimized sample flow cells using ruggedized industrial fiber optic cables. Flow cells meet the sample demands of a high pressure liquid hydrocarbon while electrical compliance is not an issue as there is no at line electrical connections or sensors.

The sample cell can be installed directly in the process line, although it is more typically installed in a side stream to aid maintenance and contractual verification requirements. A hard media verification system can be included as an optional extra. Kemtrak



flow cells require very simple sample handling systems; all that is required is a stable flow running through the flow cell to ensure the measurement is a true representation of the

actual process flow. Particulate and turbidity in the sample are not an issue and are compensated for using a reference wavelength.

A TRUE PROCESS INSTRUMENT

Kemtrak have an impressive installed base around the world in a great many applications. The applications team at Kemtrak has a deep expertise in chemistry and optical measurement and are available to review applications to determine suitability of a DCP007 for on-line color and/or concentration monitoring of process liquids across all markets.

The DCP007 analyzer is routinely used in a wide variety of gas and liquid applications. It provides the following features:

- > Zero moving parts within the analyzer provide excellent stability, resolution and the ultimate in reliability
- > LED light sources individually controlled for stable, unwavering output and consistency
- > A dual channel approach compensates for entrained particulate and solids
- > Wavelengths from 250nm to 2000nm with modular flow cell configuration for wide flexibility and applicability