

# Backscatter Immersion Process Probe


## Applications:

- Crystallization control
- Fermentation control
- Cell culture & biomass monitoring
- Interface detection

The Kemtrak backscatter immersion probe is designed to accurately measure suspended solids directly in tanks and pipelines. The immersion probe has the same dimensions as industry standard Ø12 mm PG 13.5 pH sensors allowing a range of standard fittings and retractable probe holders to be used.

The dual fiber optic design of the immersion probe provides high resolution at low turbidity with excellent linearity all the way up to extremely high turbidity when used with a Kemtrak NBP007 near-infrared backscatter photometer.

A unique benefit of the Kemtrak backscatter immersion probe is that it does not go blind at high sample turbidity. Other probes will stop working at 4000 NTU/FNU (<1 wt% solids) after which the signal will decrease resulting in an erroneous and misleading output. The output of the Kemtrak probe will continue to increase with sample concentration ensuring a reliable measurement.

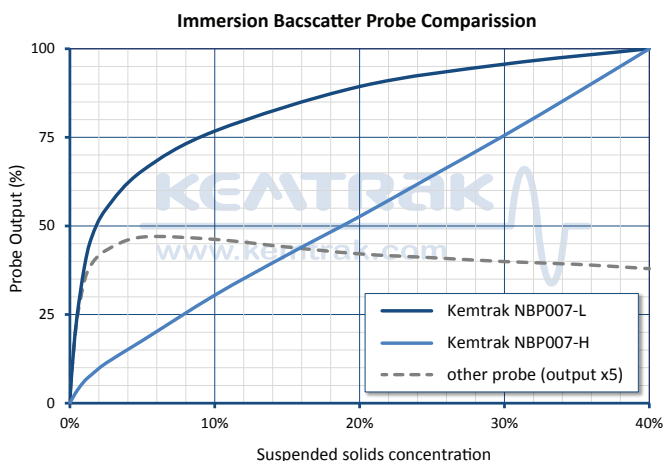


The compact design of the immersion probe makes the instrument suitable for laboratory bench-top work to the most demanding commercial process installations.

Standard probe design is in 316L stainless steel or Hastelloy C-22 with a robust scratch resistant sapphire window. The highly polished probe surface ensures freedom from fouling and suitability for sanitary applications.

The fiber optic immersion probe has no electronics that will be damaged by high temperature process streams or sterilization cycles and are well suited for both ordinary and hazardous area installation. Retractable probe holders can be used for automated cleaning and validation.

All Kemtrak products are designed to meet the most demanding application specifications and are made from the highest quality materials to ensure exceptionally long life and the highest reliability possible.



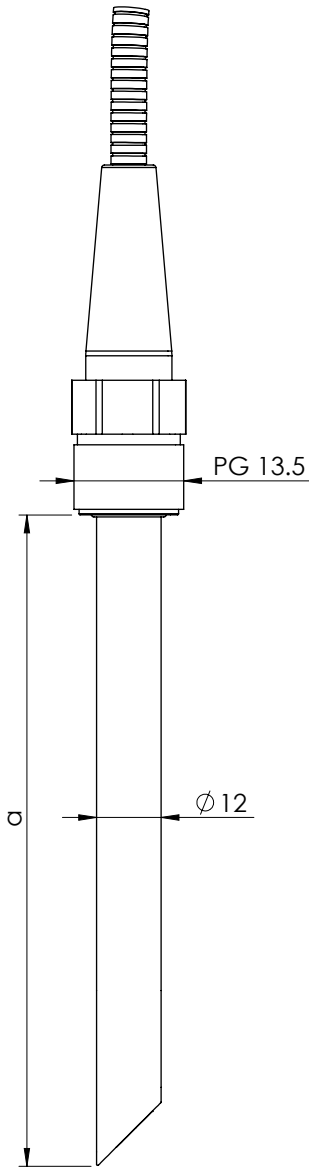

### Benefits:

- 0.001% (ca. 10 NTU) to 100% total suspended solids
- Compatible with industrial pH sensor dimensions (DIN 19263:2007-05)
- Probe lengths (a) 120mm, 225mm, 325mm & 425mm  
*Other lengths available on request*
- Sapphire window is mounted from inside of probe and sealed using o-rings (no epoxy) - impossible to fall out in the process
- Suitable for ordinary and hazardous area installation

## Technical Data Immersion Backscatter Probe

### Measurement Range

0.001 % (ca. 10NTU) to 100% total suspended solids

### Manifold

Compatible with industrial pH sensor dimensions  
DIN 19263:2007-05, Ø 12mm, PG 13.5  
Standard probe length 120±2mm, 225mm, 325mm & 425mm  
*Custom lengths available on request*

### Materials

Stainless EN 1.4435 / 316L or  
Hastelloy C-22

### Window

Sapphire

### Surface Finish

Ra < 0.38µm

### Elastomers

FPM (FKM/Viton®), FFKM (Chemraz®/Kalrez®, FDA), EPDM (FDA)

### Operating Conditions

Ambient & process temperatures up to 200°C (392°F)  
Process pressure from 10mbar to 50bar (0,14 – 725 psi)  
*Operating conditions subject to material and design in use*

### Fibre Optic cable

Silica core photonic fiber with Kevlar® reinforced flexible  
LZSH coated stainless steel jacket  
Fully-interlocked stainless steel conduit for use above 85°C (185°F)  
Terminated with SMA 905 connectors  
5m standard (16.4ft)  
Lengths up to 20m (66 ft)

### Protection

IP66 / EN 60529

### Recommended Controller

Kemtrak NBP007 backscatter photometer

**KEATRak**  
www.kemtrak.com

Kemtrak AB • Box 2940 • SE-187 29 Stockholm • Sweden  
Info@kemtrak.com • www.kemtrak.com

*We reserve the right to make changes  
without previous notice*

### South Fork Instruments, Inc.

3845 Buffalo Road  
Auburn, CA 95602  
USA

Tel. : +1 (925) 461 5059  
info@southforkinstruments.com  
http://www.southforkinst.com

*Kemtrak is a leading manufacturer of fiber optic measuring and automation products for the process engineering industry. Kemtrak provides tailor made solutions to meet the needs of a wide range of industries including chemical, petrochemical & offshore, biotech, pharmaceutical, food & beverage, pulp and paper and water & environment. Kemtrak has trained representatives and support personnel globally and is certified according to ISO 9001:2015.*